



SHELL CORENA S2P

A premium quality reciprocating air compressor lubricant based on a blend of specially selected base oils to provide a level of performance approaching that of synthetic oils.



PERFORMANCE FEATURES

- LONG OIL LIFE–MAINTENANCE SAVING**
 Allows the service interval between valve and piston maintenance to be extended over normal service practices due to low deposits forming tendencies. Compressors can be kept in service for much longer periods, operating at a consistently high level of efficiency.
- ENHANCED AIR–LINES SAFETY**
 In discharge air-lines, the combination of rust particles, dispersed in carbonaceous deposits, coupled with heat from recently compressed air, can cause an exothermic reaction leading to the possibility of fires and explosion. Shell Corena S2 P helps to minimise the likelihood of this danger arising.
- MAINTENANCE SYSTEM EFFICIENCY**
 Resistant to the formation of carbon deposits and lacquer on valves and piston crowns, caused by the by-products of corrosion, such as ferric oxides and hydroxides, at high working temperatures and pressures. Such deposits can cause serious damage, lower compressor efficiency and increase maintenance costs. Shell Corena S2 P separates readily from water allowing excess water to be drained from the oil circulation system, thus preventing accelerated corrosion and a reduction in lubrication efficiency. This also helps to separate oil from condensate in oil/water separators and drier units.
- OUTSTANDING WEAR PROTECTION**
 Effectively protects all metal surfaces from corrosion. Protects all sensitive machinery parts (e.g. housings, valves, bearings, from wear to help prolong the service intervals).

APPLICATIONS

- RECIPROCATING AIR COMPRESSORS**
 Industrial reciprocating air compressors operating with air discharge temperatures of up to 220°C.
- BREATHING AIR COMPRESSORS**
 Shell Corena S2 P may be used in breathing air compressors, provided subsidiary clean-up apparatus is used to ensure that the air produced is fit for breathing.

COMPATIBILITY AND MISCIBILITY

- SEAL COMPATIBILITY**
 Shell Corena S2 P is compatible with all sealing materials commonly used in air compressors.
- SPECIFICATIONS, APPROVALS AND RECOMMENDATIONS**
 DIN 51506 VDL
 ISO 6743-3:2003 DAA Normal Duty

TYPICAL PHYSICAL CHARACTERISTICS

CHARACTERISTICS	68	100	150
Kinematic Viscosity (ASTM D 445)			
@ 40°C mm ² /s	68	100	155
@ 100°C mm ² /s	7.8	9.2	12.1
Density @ 15°C kg/m ³	883	899	902
Flash Point (COC) °C (ASTM D 92)	235	240	240
Pour Point °C (ASTM D 97)	-33	-33	-30
Neutralisation Value mg KOH/g	0.3	0.3	0.3
Sulphated Ash % m	0.06	0.06	0.06
Oxidation Stability (delta-CCR) % m	1.8	2	2.3
Properties of the distillation residues 20% (DIN 51562)			
Carbon residue (CCR) %m	0.3	0.3	0.3
Rust Prevention Properties (steel) degrees (ASTM D 665-B)	Pass	Pass	Pass
Water Stability @ 54°C min (ASTM D 1401)	30	–	–
@ 82°C min	–	20	20

Toll Free: 1300 660 854

VICTORIA

Phone: (61 3) 9587 7700
 Facsimile: (61 3) 9587 7711

NEW SOUTH WALES

Phone: (61 2) 9791 1011
 Facsimile: (61 2) 9791 1022


QUEENSLAND

Phone: (61 7) 3272 7500
 Facsimile: (61 7) 3272 7505

SOUTH AUSTRALIA

Phone: (61 8) 8297 1722
 Facsimile: (61 8) 8297 1733



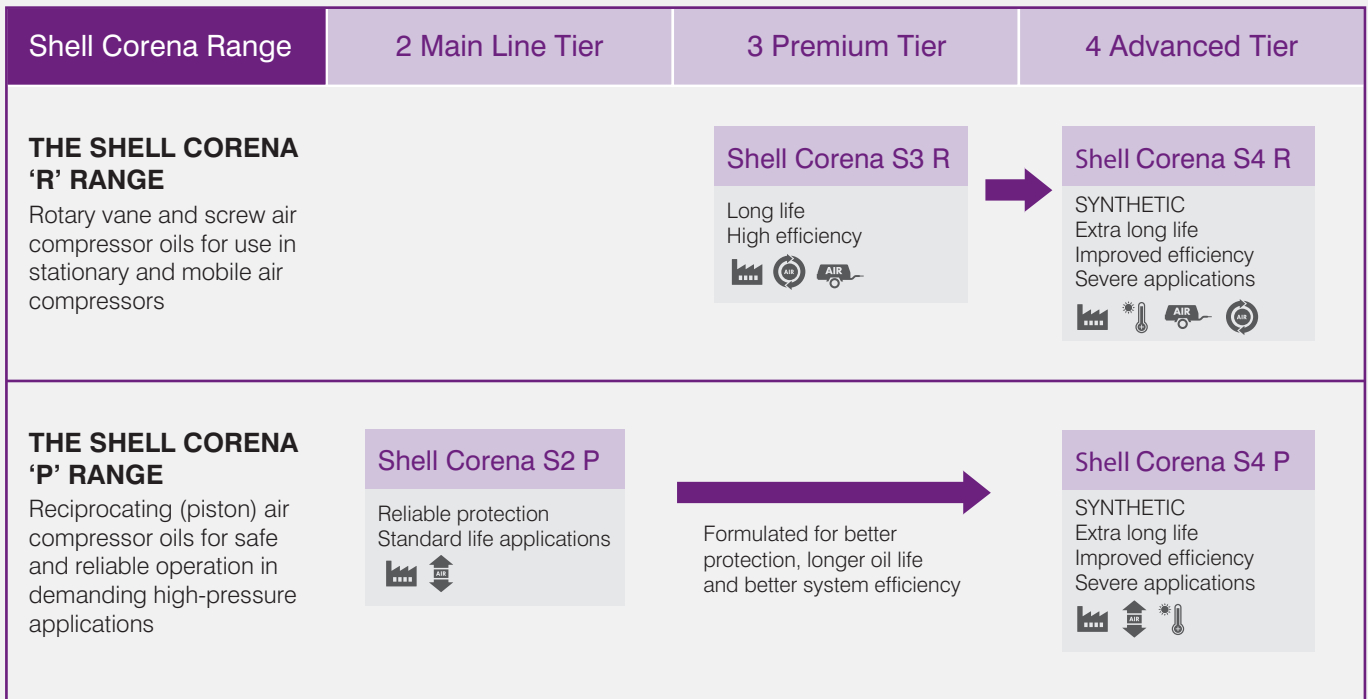


INCREASINGLY EFFICIENT PROTECTION >>>>



PRODUCT-NAME SUFFIX KEY

- P** = High pressure/reciprocating (piston) air compressors
- R** = Rotary vane and screw air compressors

APPLICATION ICON KEY

-  Rotary vane and screw air compressors
-  Factory/machine applications
-  Mobile air compressors
-  High temperature
-  Reciprocating (piston) air compressors

Oil Product	Replacement Product	Performance Features	Applications
Shell Corena AS	Shell Corena S4 R 46, 68	Extra long life System efficiency Severe applications	Rotary vane and screw air compressors Factory/machine applications Mobile air compressors High temperature
Shell Corena S	Shell Corena S3 R 46, 68	Long life System efficiency	Rotary vane and screw air compressors Factory/machine applications Mobile air compressors
Shell Corena AP	Shell Corena S4 P 68, 100	Extra long life System efficiency Severe applications	Factory/machine applications Reciprocating (piston) air compressors High temperature
Shell Corena P	Shell Corena S2 P 68, 100, 150	Reliable protection Standard life applications Severe applications	Factory/machine applications Reciprocating (piston) air compressors

Toll Free: 1300 660 854

VICTORIA

Phone: (61 3) 9587 7700
Facsimile: (61 3) 9587 7711

NEW SOUTH WALES

Phone: (61 2) 9791 1011
Facsimile: (61 2) 9791 1022

QUEENSLAND

Phone: (61 7) 3272 7500
Facsimile: (61 7) 3272 7505

SOUTH AUSTRALIA

Phone: (61 8) 8297 1722
Facsimile: (61 8) 8297 1733